

2007 Bimini Installation

1. Mark tower and install both lower mounting brackets.



Figure 1

Measuring inside where the tower bars join, mark at $1 \frac{1}{16}$ " and at $21 \frac{1}{2}$ ". See figure 1, A & B. This should be done on each side of the tower mirroring each other. These measurements are to the center of each piece of hardware. "A" is mounted in line with the curve of the lower bar facing in, with female end horizontal with the ground. "B" is mounted following the contour of the tower causing it to be angled off vertical toward the center of the boat. See figure 2, front of tower and figure 3, behind tower. Install brackets on adjacent side of tower.



Figure 2



Figure 3

Four total brackets should now be mounted.

2. Mark tower and install upper mounting brackets.



Figure 4

Measuring from the quick release knob, make a mark at 18 ½” and 25”. See Figure 4, C & D. This should be done on each side of the tower mirroring each other. These measurements are to the center of each piece of hardware. Both “C” and D” are mounted toward the center of the boat, in line with upper tower bar, and female end horizontal to ground. Install hardware on adjacent side of tower.

Eight brackets should now be mounted. See figure 5.

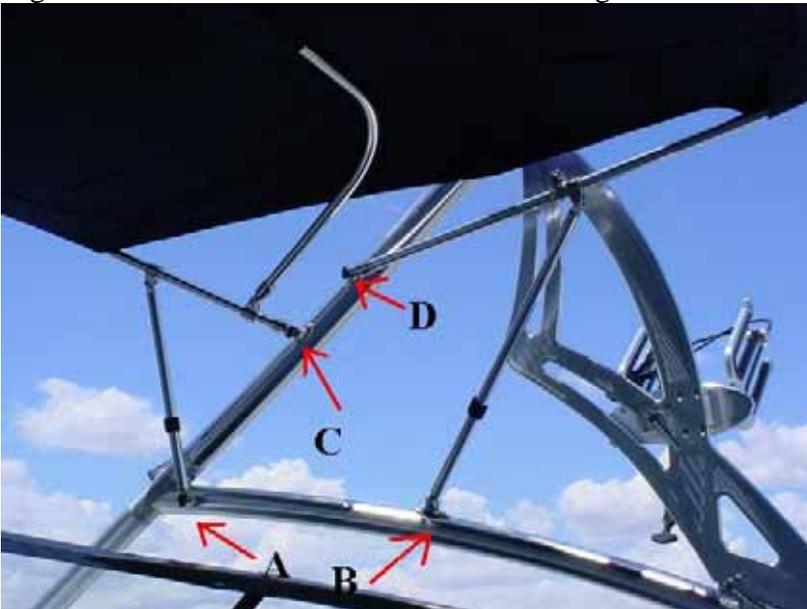


Figure 5

Once you are to this point, the Bimini can now be placed on tower.

Note: These next steps can be done by one person, but are significantly easier if two people are involved.

3. Install B & D.

With the Bimini on the floor, locate connectors “B” & “D” coordinating with the hardware previously mounted on the tower. See figure 6. The picture also shows the direction the Bimini will be on the boat.

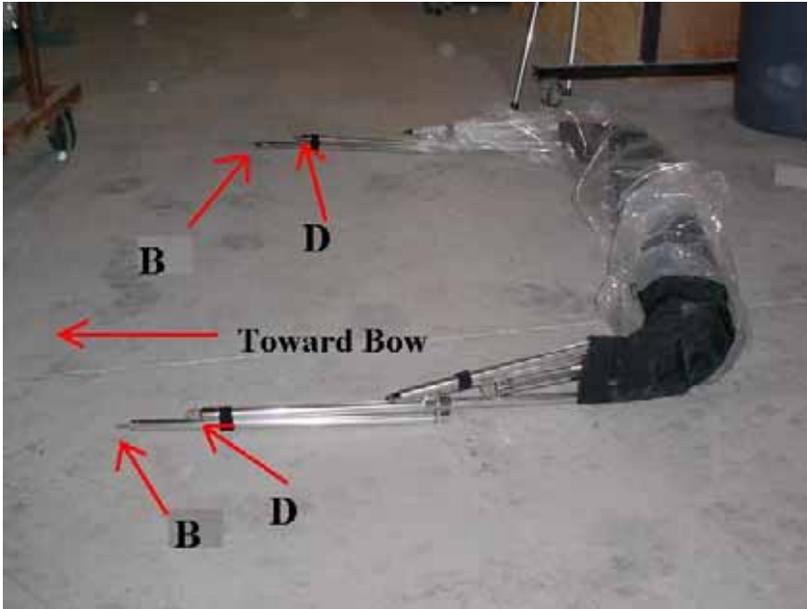


Figure 6

Now join “D” connector and bracket together on each side of the boat. Once both sides are installed, undo the Velcro holding “B”. See figure 7.

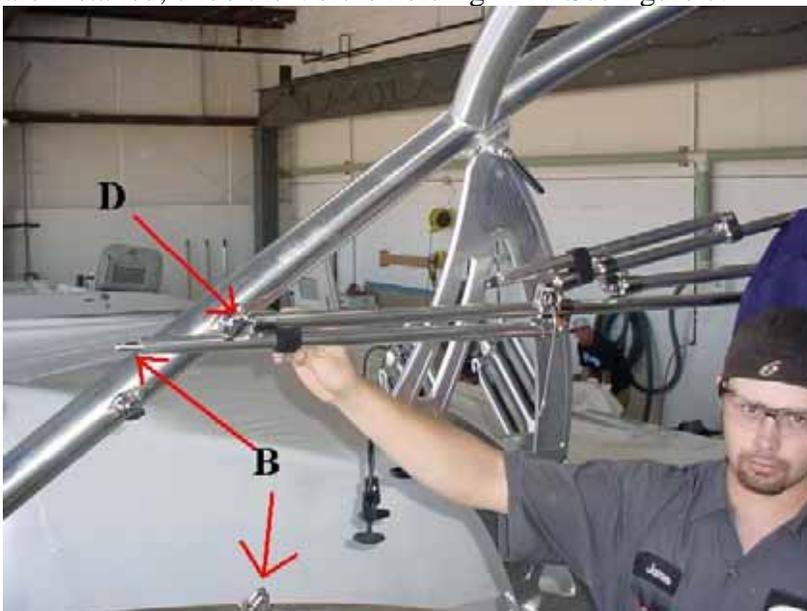


Figure 7

Mount to connection “B” as well. See figure 8.



Figure 8

With the canvas cover still zipped closed and the Bimini mounted at “B” and “D”, it is safe to cruise the lake. See figure 9.



Figure 9

Open the Bimini

4. Unzip the canvas cover. See figure 10.



Figure 10

5. Release support from storage pin on each side of the Bimini. See figure 11.



Figure 11

6. Join connection “C” with mount “C”. See figure 12.



Figure 12

7. Release Velcro from connection “A” and join “A”. See figure 13.



Figure 13

Once both sides have “A” in place along with the other connections, the Bimini is open and ready for the Lake.

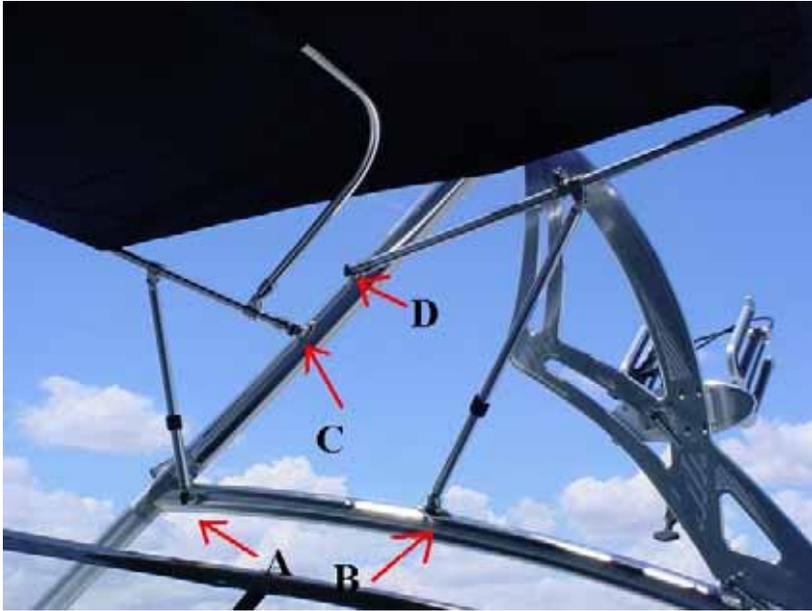


Figure 14



Figure 15



Figure 16



Figure 17