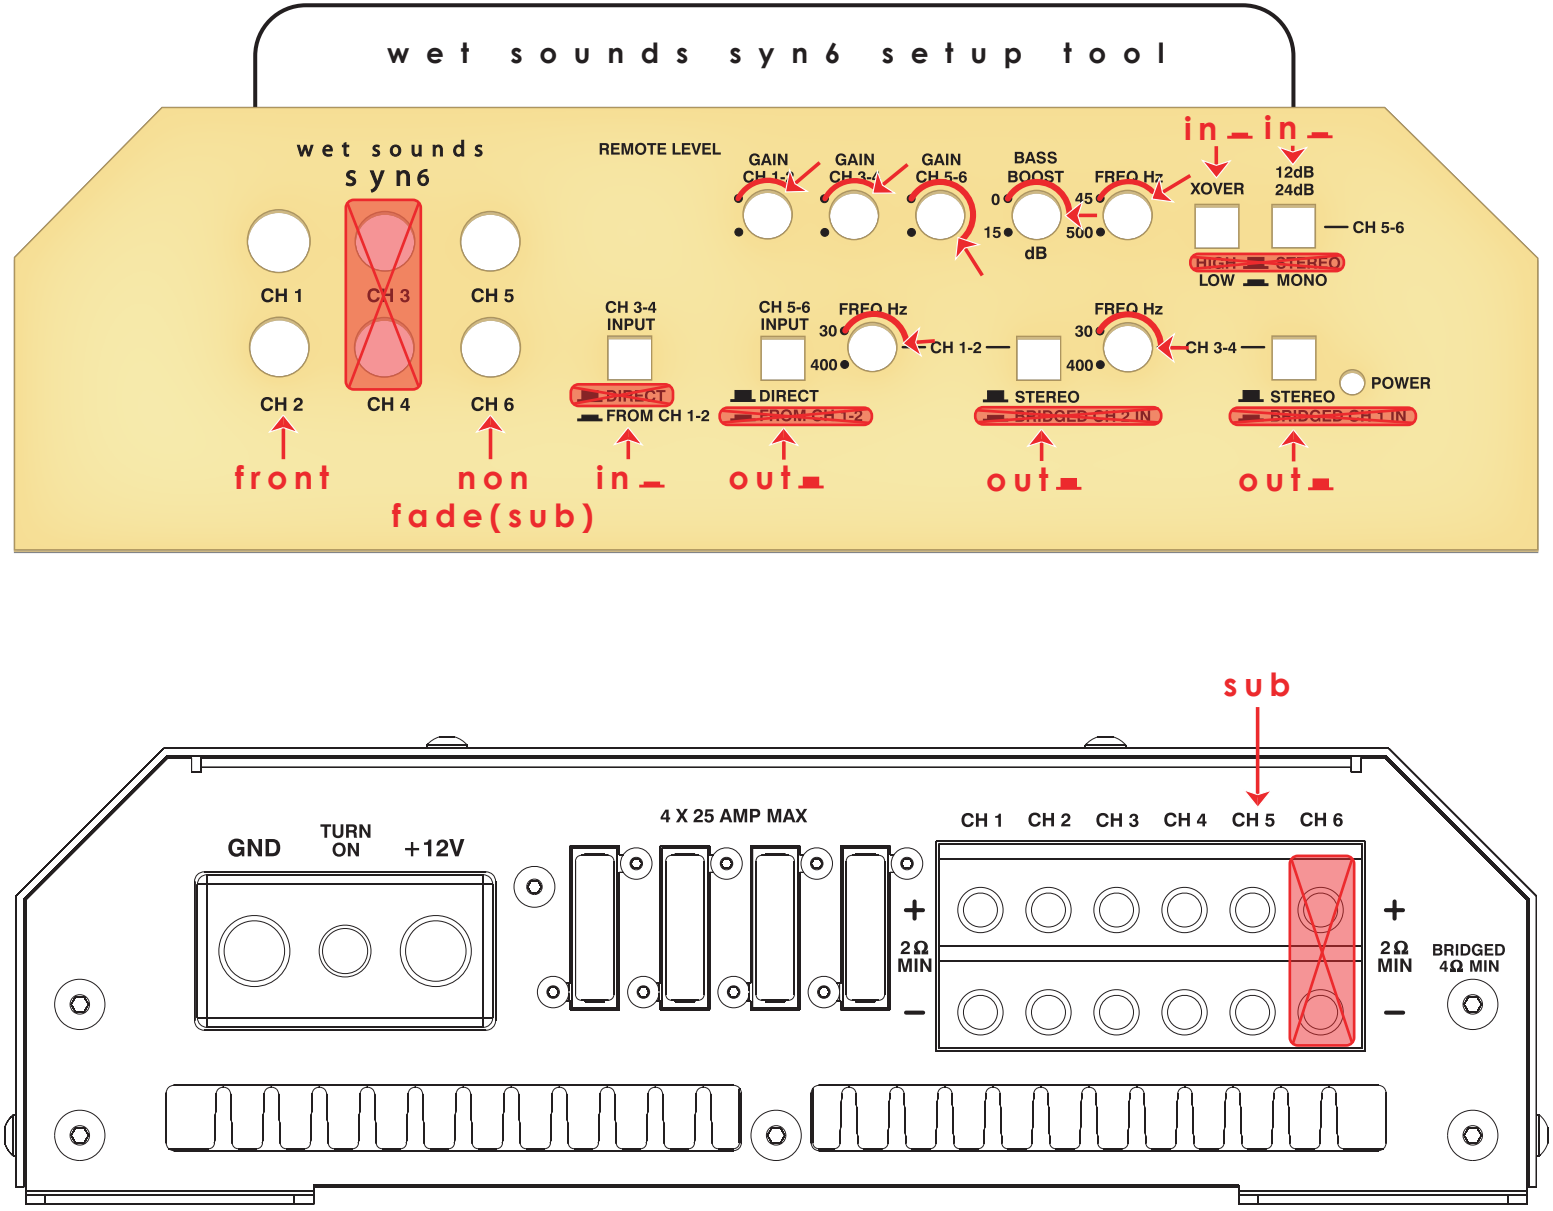
wet sounds syn6 setup tool
wet sounds
syn6
REMOTE LEVEL
GAIN CH 1-2
GAIN CH 3-4
GAIN CH 5-6
BASS BOOST
0
15
dB
45
500
FREQ Hz
XOVER
in
in
12dB
24dB
CH 5-6
HIGH
STEREO
LOW
MONO
CH 1
CH 3
CH 5
CH 2
CH 4
CH 6
front
non fade(sub)
CH 3-4 INPUT
DIRECT
FROM CH 1-2
in
CH 5-6 INPUT
DIRECT
FROM CH 1-2
out
FREQ Hz
30
400
CH 1-2
out
FREQ Hz
30
400
CH 3-4
STEREO
BRIDGED CH 2 IN
STEREO
BRIDGED CH 1 IN
POWER
out
sub
GND
TURN ON
+12V
4 X 25 AMP MAX
+
2Ω MIN
−
CH 1
CH 2
CH 3
CH 4
CH 5
CH 6
+
2Ω MIN
−
BRIDGED 4Ω MIN